


## GRAMPS

# ALUMINUM OR ALLOY ANCHOR CLIPS COPPER

Used to anchor cables of bare MV networks of aluminum or copper cables.

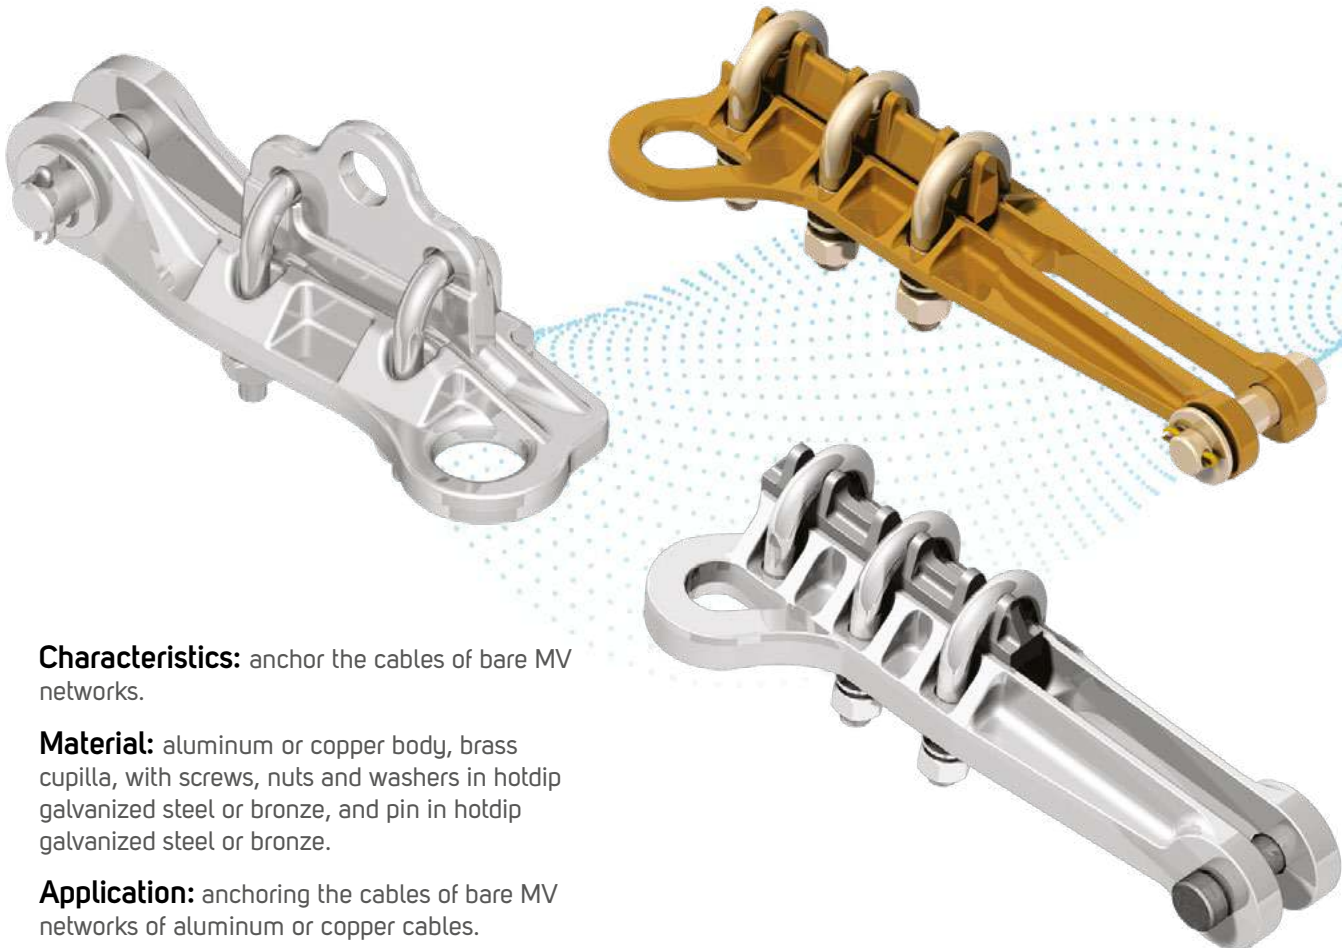

**Characteristics:** anchor the cables of bare MV networks.

**Material:** aluminum or copper body, brass cupilla, with screws, nuts and washers in hotdip galvanized steel or bronze, and pin in hotdip galvanized steel or bronze.

**Application:** anchoring the cables of bare MV networks of aluminum or copper cables.

Aluminum

| CONDUCTORS                     |        | BREAKING LOAD<br>(DAN) |
|--------------------------------|--------|------------------------|
| CONDUCTOR GAUGE<br>(AWG / MCM) |        |                        |
| CA/CAA                         | CA/CAA | 2000                   |
| 4                              | 2/0    | 2000                   |

Aluminum

| CONDUCTORS                     |       | BREAKING LOAD<br>(DAN) |
|--------------------------------|-------|------------------------|
| CONDUCTOR GAUGE<br>(AWG / MCM) |       |                        |
| CA                             | CAA   | 3500                   |
| 4/0                            | 336,4 | 3500                   |

Copper

| CONDUCTORS                     |    | BREAKING LOAD<br>(DAN) |
|--------------------------------|----|------------------------|
| CONDUCTOR GAUGE<br>(AWG / MCM) |    |                        |
| Cu                             | Cu | 2000                   |
| 25                             | 70 | 2000                   |

Copper

| CONDUCTORS                     |     | BREAKING LOAD<br>(DAN) |
|--------------------------------|-----|------------------------|
| CONDUCTOR GAUGE<br>(AWG / MCM) |     |                        |
| Cu                             | Cu  | 3500                   |
| 25                             | 120 | 3500                   |